

DATASHEET


Magnetically coupled pump

RM 3 – 28/230

Motor output

1,5kW

3450 rpm [2-pol. 60Hz]

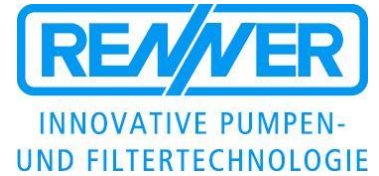

Magnetically coupled, centrifugal pumps, single-stage, horizontal, non self-priming, made in monobloc design.


		RM3 - 28/230
Motor output	[kW]	1,5
Rated current @ 400V 50Hz 3ph.	[A]	3,0
Head max.	[mWS]	28
Capacity max.	[l/min.]	230
Density max. @ Qmax	[g/cm³]	1,2
Length „L“	[mm]	400

Materials:



Only for 3500 rpm !!

Technical data


Medium-temperature max.	PP PVDF Stainless	80 °C 95 °C 100 °C	<div style="text-align: center;"> <h3>Flow curves RM3 - 28/230</h3> <p>Speed: 3450 rpm @ 60Hz</p> <p>Values based on water at 20 °C (68 °F) / Measured value +/- 10%</p> <p>Subject to technical alterations !</p> </div>
System-pressure max.	PP PVDF Stainless	2,5 bar 3,5 bar 8,0 bar	
Viscosity	< 160 Pa s		
Elektrical motor	3-ph. motors, 50 and 60Hz, IE2, IE3 or IE4 Protection IP55, Isolationclass F , Chemical resistant 2K- painting RAL5011		
Options	<i>Thermal protection, other voltages / frequencies, UL, CSA, Special paintings and colors</i> 		

DATASHEET

Magnetically coupled pump


RM 3 – 28/230

Motor output
1,5kW
3450 rpm [2-pol. 60Hz]

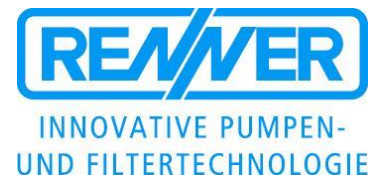

Dimensional drawings [mm]

Motor output 1,5kW 2-pol.

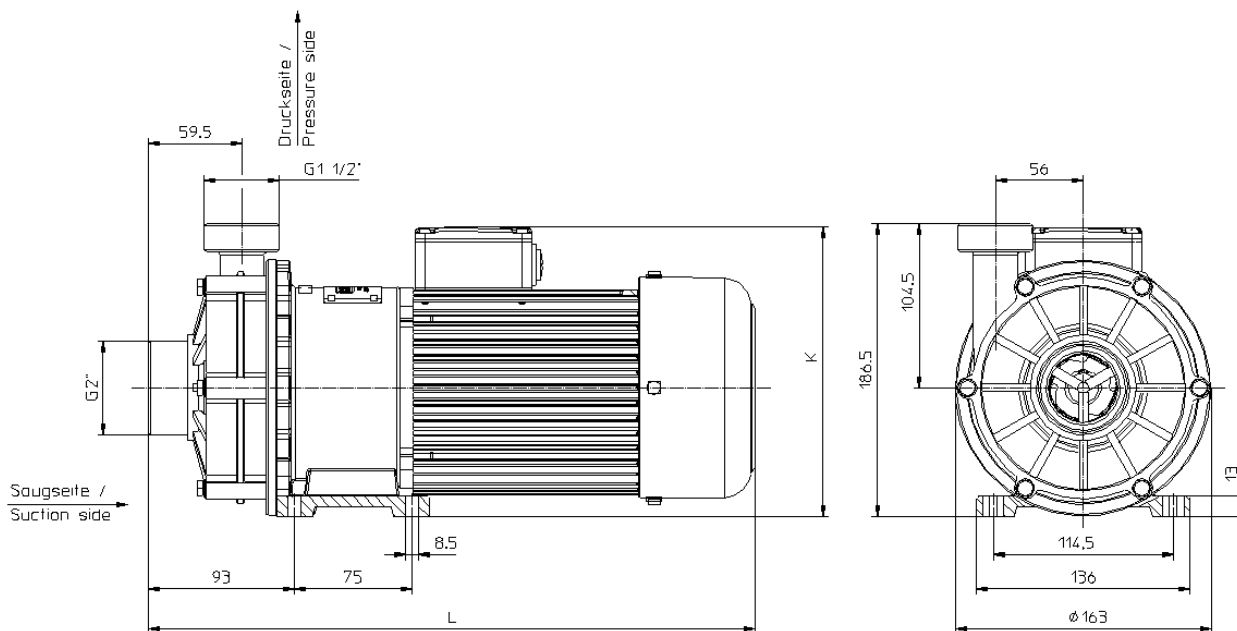


Motor dimensions can be different ! ● Subject to technical alterations !

DATASHEET


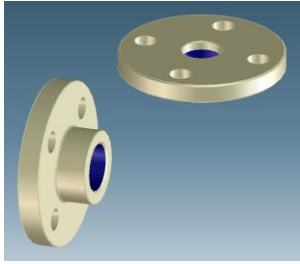
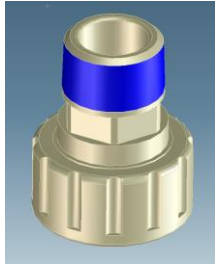
Magnetically coupled pump

RM 3 – 28/230

Motor output
1,5kW
3450 rpm [2-pol. 60Hz]

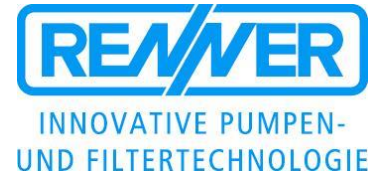

Accessories / Options


Hose connection	Flange (DIN, ANSI)	NPT - Adapter
 <p>26mm 32mm 40mm</p>	 <p>DN40 PN10 (DIN EN 1092-3) DN50 PN10 (DIN EN 1092-3) 1.5" (ANSI Class 150) 2" (ANSI Class 150)</p>	 <p>NPT (M) 1" NPT (M) 1.5"</p>

Monitor and protect your pump and your process !

Electronic process monitoring -> RPR-Control



- Monitoring the filter fouling
- Dry running
- Overheating
- Overload

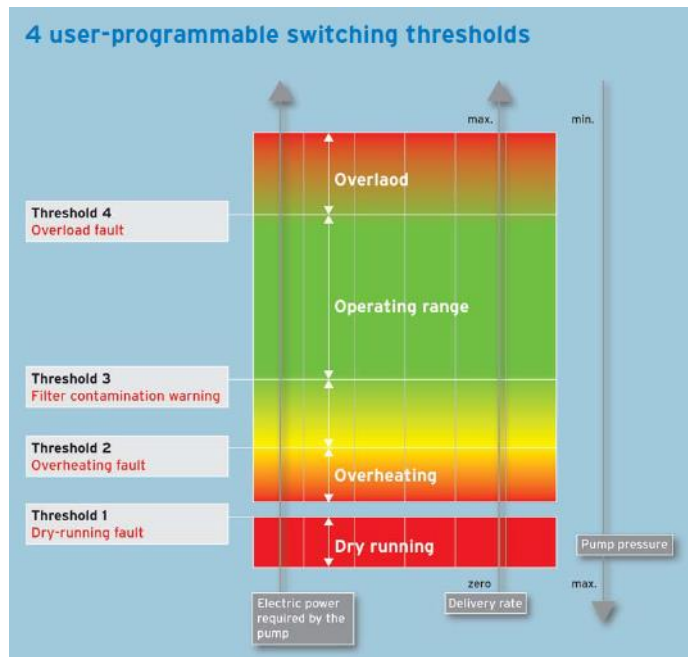

Subject to technical alterations !