

DATASHEET

Magnetically coupled pump

RM 5 – 22/500

Motor output

2,2kW
1450 or 1750 rpm [4-pol.]




Magnetically coupled, centrifugal pumps, single-stage, horizontal, non self-priming, made in monobloc design.

			RM5 - 22/500
Motor output	[kW]		2,2
Rated current @ 400V 50Hz 3ph.	[A]		5,0
Head max.	[mWS]		22
Capacity max.	[l/min.]		500
Density max. @ Qmax	[g/cm³]		1,0
Length „L“	IE2	[mm]	605

Materials:



Technical data

Medium-temperature max.	PP PVDF	80 °C 95 °C	<div style="text-align: center;"> <h3>Flow curves RM5 - 22/500</h3> <p>Speed: 1450 rpm @ 50Hz or 1750 rpm @ 60Hz</p> <p>Values based on water at 20 °C (68 °F) / Measured value +/- 10%</p> <p>Subject to technical alterations !</p> </div>
System-pressure max.	PP PVDF	6,0 bar 6,0 bar	
Viscosity	< 160 Pa s		
Electrical motor	3-ph. motors, 50 and 60Hz, IE2, IE3 or IE4 Protection IP55, Isolationclass F , Chemical resistant 2K- painting RAL5011		
Options	<i>Thermal protection, other voltages / frequencies, UL, CSA, Special paintings and colors</i> 		

DATASHEET


Magnetically coupled pump

RM 5 – 22/500

Motor output


2,2kW

1450 or 1750 rpm [4-pol.]

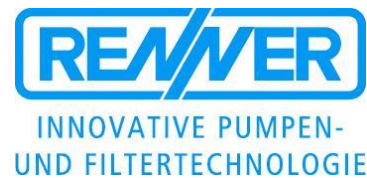

Dimensional drawings [mm]

Motor output 2,2kW IE2 (4-pol.)

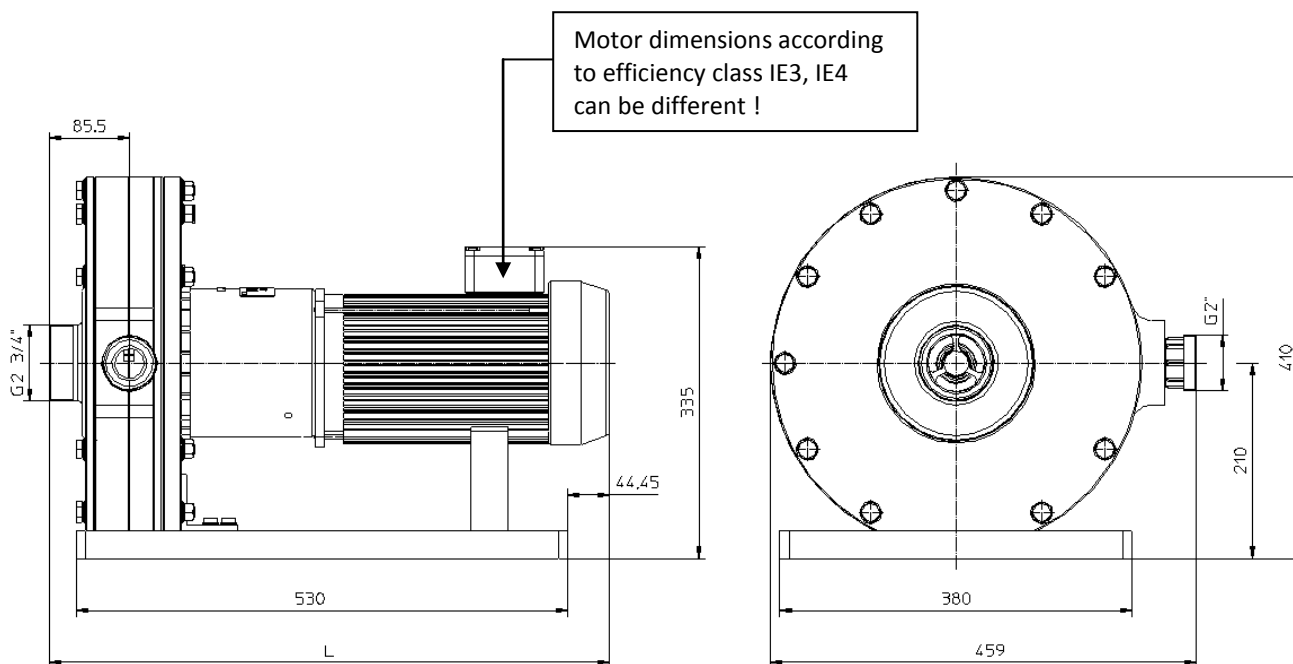

Motor dimensions can be different ! ● Subject to technical alterations !

DATASHEET

Magnetically coupled pump

RM 5 – 22/500


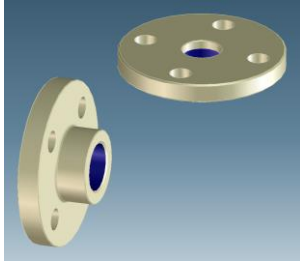

Motor output

2,2kW

1450 or 1750 rpm [4-pol.]



Accessories / Options


Hose connection	Flange (DIN, ANSI)	NPT - Adapter
 <p>40mm 50mm 63mm</p>	 <p>DN50 PN10 (DIN EN 1092-3) DN65 PN10 (DIN EN 1092-3) 2.5" (ANSI Class 150) 2" (ANSI Class 150)</p>	 <p>NPT (M) 2.5" NPT (M) 3"</p>

Monitor and protect your pump and your process !

Electronic process monitoring -> RPR-Control



- Überwachung Filterverschmutzung
- Trockenlaufschutz
- Heißlaufschutz
- Überlast-Schutz

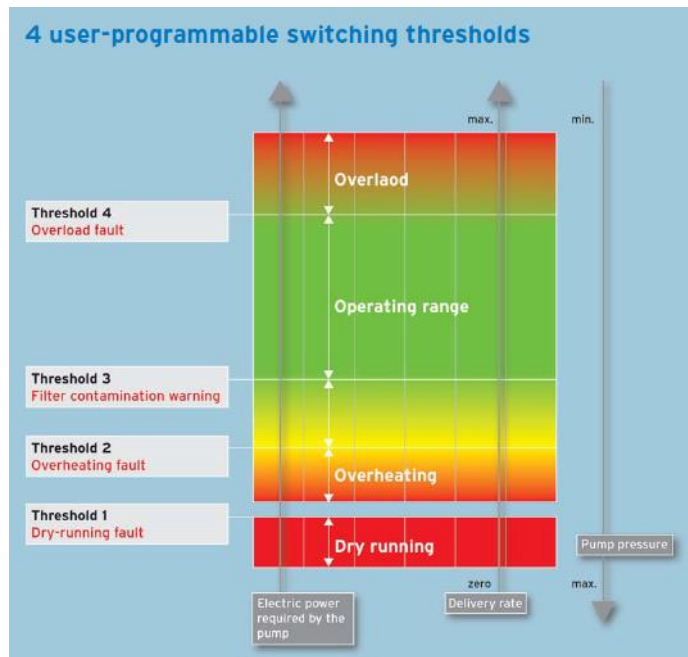

Subject to technical alterations !