

# DATASHEET

## Magnetically coupled pump

Safe to run dry

Motor output  
0,25kW ; 0,37kW ; 0,55kW  
2900 or 3450 rpm [2-pol.]




### RM-TS 3 Type 10/120


Magnetically coupled, centrifugal pumps, single-stage, horizontal, non self-priming, made in monobloc design.

		RM-TS 3 Type 10/120		
Motor output	[kW]	0,25	0,37	0,55
Rated current @ 400V 50Hz 3ph.	[A]	0,68	1,1	1,45
Rated current @ 230V 50Hz 1ph.	[A]	1,7	2,7	3,5
Head max.	[mWS]	10	10	10
Capacity max.	[l/min.]	160	160	160
Density max. @ Qmax	[g/cm <sup>3</sup> ]	1,0	1,45	2,2
Length „L“	[mm]	331	331	341

#### Materials:

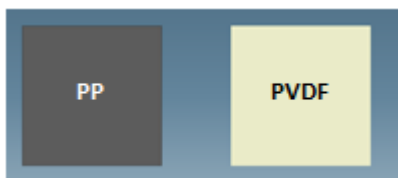

#### Technical data

Medium-temperature max.	PP PVDF	80 °C 95 °C	<div style="text-align: center;"> <h3>Flow curves RM-TS 3 Type 10/120</h3> <p>Speed: 2900 rpm @ 50Hz or 3450 rpm @ 60Hz</p> <p>Values based on water at 20 °C (68 °F) / Measured value +/- 10%</p> <p>Subject to technical alterations !</p> </div>
System-pressure max.	PP PVDF	2,5 bar 3,5 bar	
Viscosity	< 160 Pa s		
Electrical motor	3-ph. motors, 50 and 60Hz, IE2, IE3 or IE4 Protection IP55, Isolationclass F , Chemical resistant 2K- painting RAL5011		
Options	<i>Thermal protection, other voltages / frequencies, UL, CSA, Special paintings and colors</i> 		

**DATASHEET**  
**Magnetically coupled pump**  
 Safe to run dry


**RM-TS 3 Type 10/120**

Motor output  
 0,25kW ; 0,37kW ; 0,55kW  
 2900 or 3450 rpm [2-pol.]




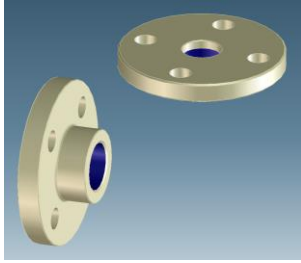
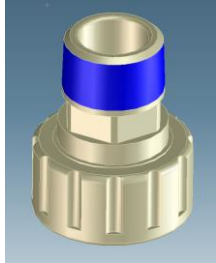
**Dimensional drawings [mm]**

**Motor output 0,25kW - 0,55kW 2-pol.**

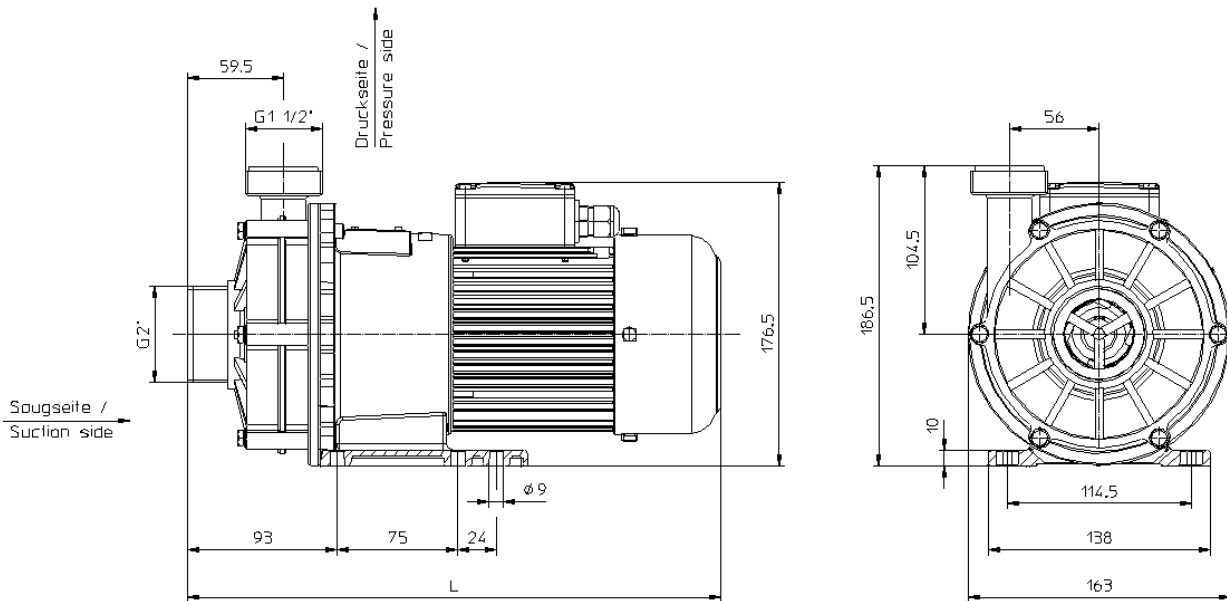

Motor dimensions can be different ! • Subject to technical alterations !

**Accessories / Options**

Hose connection	Flange (DIN, ANSI)	NPT - Adapter
 <p>26mm 32mm 40mm</p>	 <p>DN40 PN10 ( DIN EN 1092-3 )            DN50 PN10 ( DIN EN 1092-3 )            1.5" ( ANSI Class 150 )            2" ( ANSI Class 150 )</p>	 <p>NPT (M) 1"            NPT (M) 1.5"</p>