


# DATASHEET

## Magnetically coupled pump

Safe to run dry

### RM-TS 3 Type 20/200

Motor output  
0,75kW ; 1,1kW ; 1,5kW  
2900 or 3450 rpm [2-pol.]

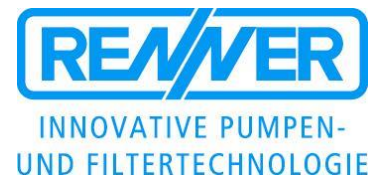

Magnetically coupled, centrifugal pumps, single-stage, horizontal, non self-priming, made in monobloc design.

		RM-TS 3 Type 20/200		
Motor output	[kW]	0,75	1,1	1,5
Rated current @ 400V 50Hz 3ph.	[A]	1,9	3,0	3,25
Rated current @ 230V 50Hz 1ph.	[A]	4,8	6,4	8,2
Head max.	[mWS]	20	20	20
Capacity max.	[l/min.]	200	200	200
Density max. @ Qmax	[g/cm³]	1,1	1,6	2,2
Length „L“	[mm]	417	430	430

#### Materials:




#### Technical data

Medium-temperature max.	PP PVDF	80 °C 95 °C	<div style="text-align: center;"> <h3>Flow curves RM-TS 3 Type 20/200</h3> <p>Speed: 2900 rpm @ 50Hz or 3450 rpm @ 60Hz</p> <p>Values based on water at 20 °C (68 °F) / Measured value +/- 10%</p> <p>Subject to technical alterations !</p> </div>
System-pressure max.	PP PVDF	2,5 bar 3,5 bar	
Viscosity	< 160 Pa s		
Electrical motor	3-ph. motors, 50 and 60Hz, IE2, IE3 or IE4 Protection IP55, Isolationclass F , Chemical resistant 2K- painting RAL5011		
Options	<i>Thermal protection, other voltages / frequencies, UL, CSA, Special paintings and colors</i>		

**DATASHEET**  
**Magnetically coupled pump**  
**Safe to run dry**


**RM-TS 3 Type 20/200**

Motor output  
 0,75kW ; 1,1kW ; 1,5kW  
 2900 or 3450 rpm [2-pol.]

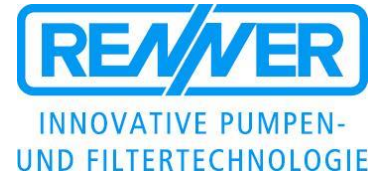


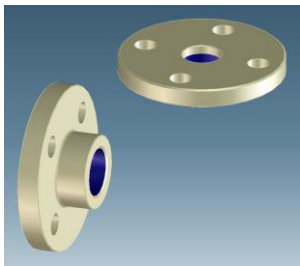
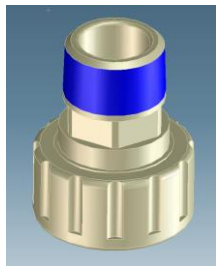
**Dimensional drawings [mm]**

**Motor output 0,75kW – 1,5kW 2-pol.**

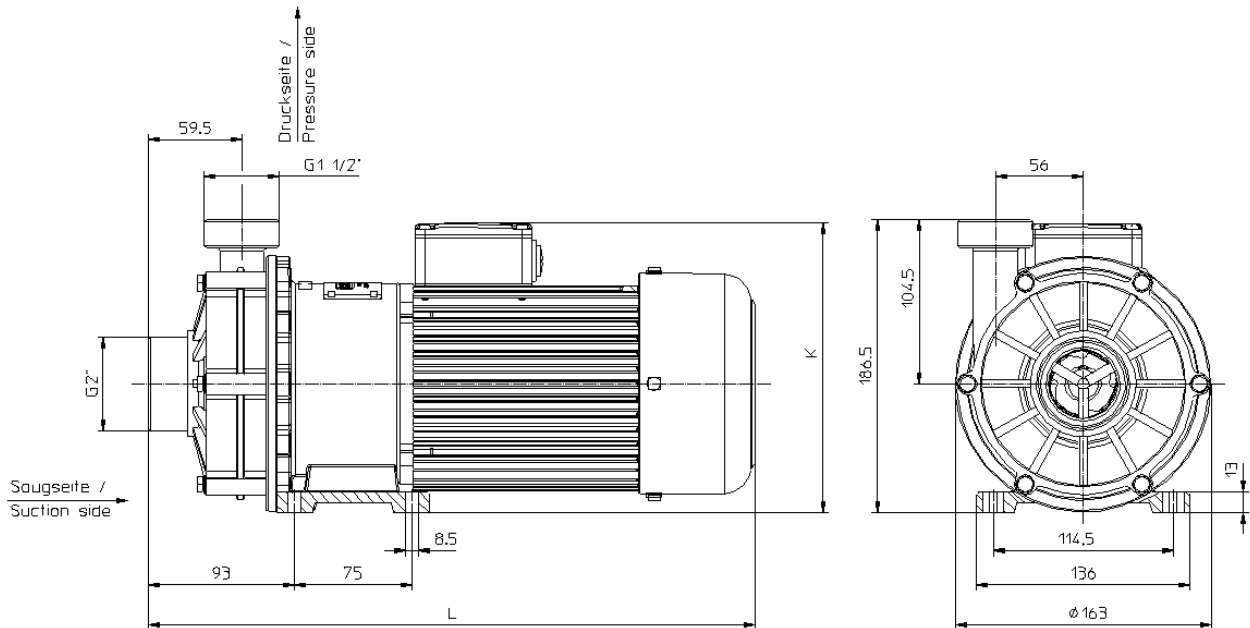

Motor dimensions can be different ! • Subject to technical alterations !

**Accessories / Options**

Hose connection	Flange (DIN, ANSI)	NPT - Adapter
 <p>26mm 32mm 40mm</p>	 <p>DN40 PN10 ( DIN EN 1092-3 )                      DN50 PN10 ( DIN EN 1092-3 )                      1.5" ( ANSI Class 150 )                      2" ( ANSI Class 150 )</p>	 <p>NPT (M) 1"                      NPT (M) 1.5"</p>